

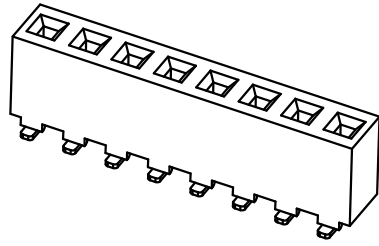



仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

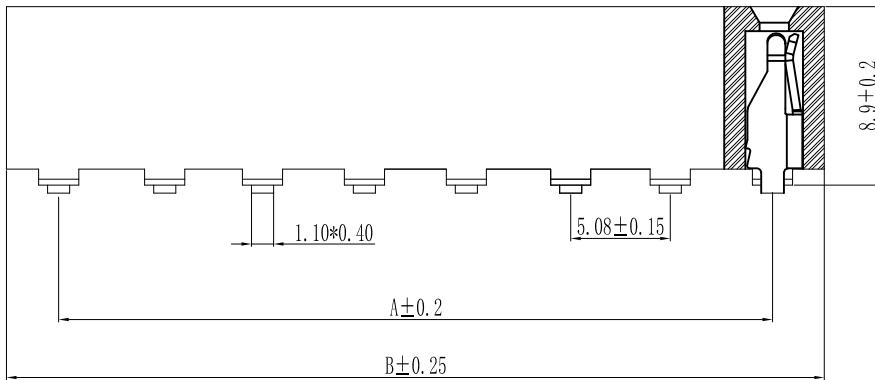

Specification:  
 Current Rating : 7AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 1000V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PBT/PA6T/LCP  
 Contact: Bronze  
 Plating : Au or Sn Over 50u" Ni

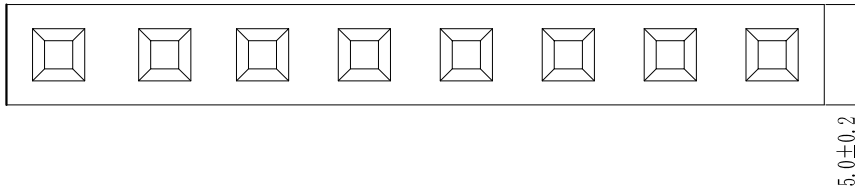

Pin数	尺寸A	尺寸B
1×2	5.08	10.16
1×3	10.16	15.24
1×4	15.24	20.32
1×5	20.32	25.40
1×6	25.40	30.48
1×7	30.48	35.56
1×8	35.56	40.64
1×9	40.64	45.72
1×10	45.72	50.80
1×11	50.80	55.88
1×12	55.88	60.96
1×13	60.96	66.04
1×14	66.04	71.12
1×15	71.12	76.20
1×16	76.20	81.28
1×17	81.28	86.36
1×18	86.36	91.44
1×19	91.44	96.52
1×20	96.52	101.60
1×21	101.60	106.68
1×22	106.68	111.76
1×23	111.76	116.84
1×24	116.84	121.92
1×25	121.92	127.00
1×26	127.00	132.08
1×27	132.08	137.16
1×28	137.16	142.24
1×29	142.24	147.32
1×30	147.32	152.40
1×31	152.40	157.48
1×32	157.48	162.56
1×33	162.56	167.64
1×34	167.64	172.72
1×35	172.72	177.80
1×36	177.80	182.88
1×37	182.88	187.96
1×38	187.96	193.04
1×39	193.04	198.12
1×40	198.12	203.20

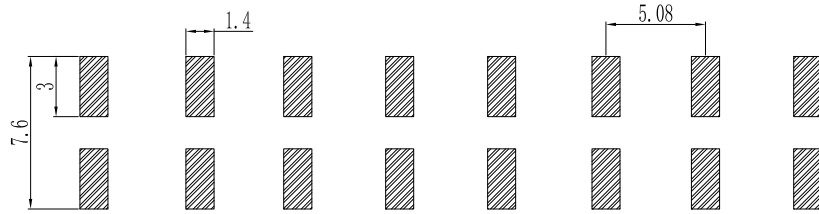

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司地址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-FH-508-0216	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
	0.0±0.30	X° REF±6°	DESIGNER				REV: A0	SHEET: 1/1
	UNIT: MM	0.00±0.20	X° ±3°	DRAWN	肖坤权		2017.06.16	
SIZE: A4	0.000±0.10	X° X'±2°	TITLE: Pitch5.08mm Female Header, Single Row, Plastic Height 8.9mm, SMT Type(U)					