





仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

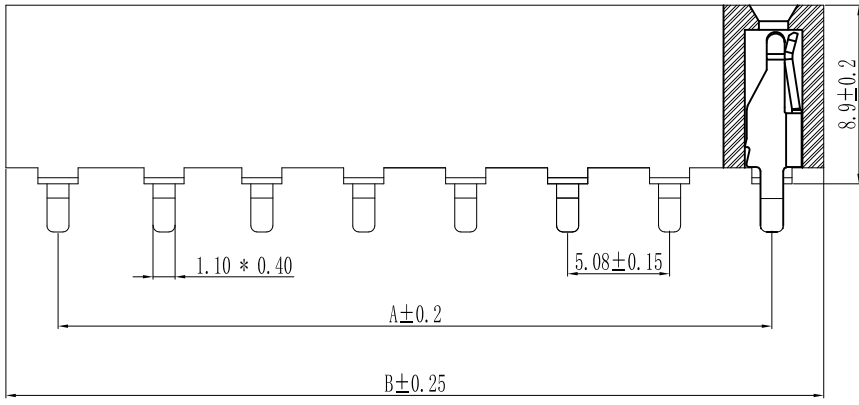

Specification:
 Current Rating : 7AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

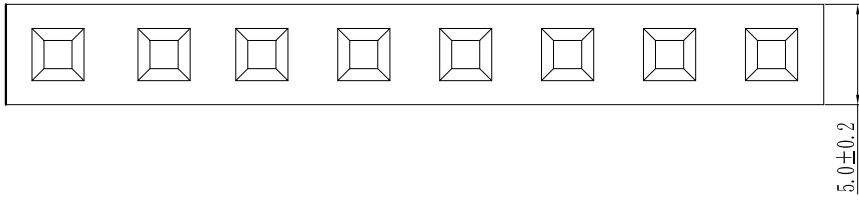

Pin数	尺寸A	尺寸B
1x2	5.08	10.16
1x3	10.16	15.24
1x4	15.24	20.32
1x5	20.32	25.40
1x6	25.40	30.48
1x7	30.48	35.56
1x8	35.56	40.64
1x9	40.64	45.72
1x10	45.72	50.80
1x11	50.80	55.88
1x12	55.88	60.96
1x13	60.96	66.04
1x14	66.04	71.12
1x15	71.12	76.20
1x16	76.20	81.28
1x17	81.28	86.36
1x18	86.36	91.44
1x19	91.44	96.52
1x20	96.52	101.60
1x21	101.60	106.68
1x22	106.68	111.76
1x23	111.76	116.84
1x24	116.84	121.92
1x25	121.92	127.00
1x26	127.00	132.08
1x27	132.08	137.16
1x28	137.16	142.24
1x29	142.24	147.32
1x30	147.32	152.40
1x31	152.40	157.48
1x32	157.48	162.56
1x33	162.56	167.64
1x34	167.64	172.72
1x35	172.72	177.80
1x36	177.80	182.88
1x37	182.88	187.96
1x38	187.96	193.04
1x39	193.04	198.12
1x40	198.12	203.20

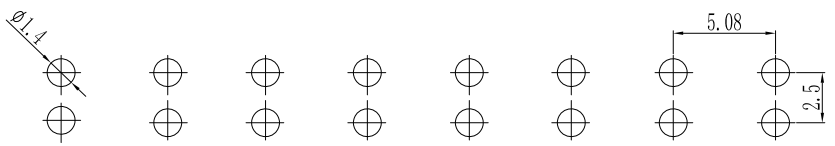

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-FH-508-0215
	LINEAR	ANGLES					APPROVED
UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER	TITLE: Pitch5.08mm Female Header, Single Row, Plastic Height 8.9mm, DIP(U)	REV: A0	SHEET: 1/1	
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN 肖坤权	2017.06.16			