

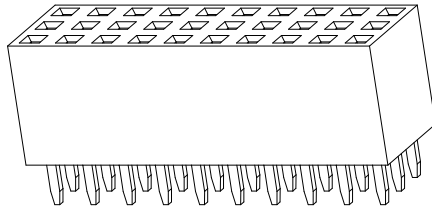
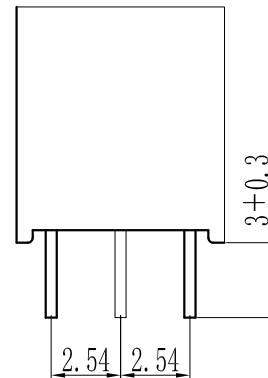


仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

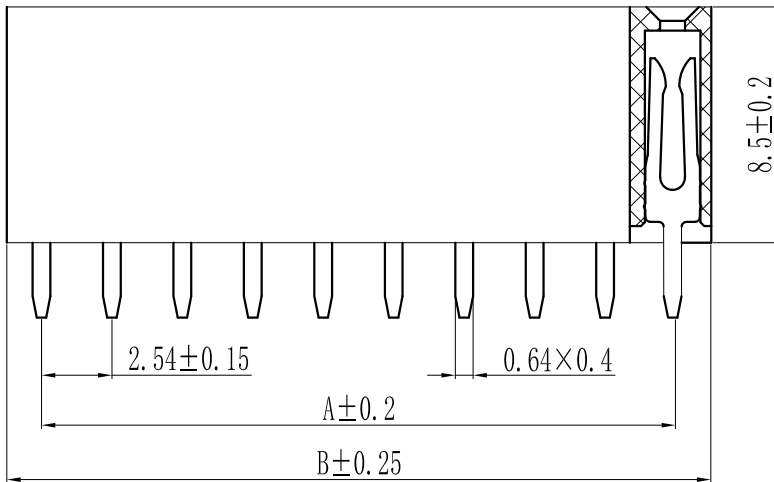

Specification:
 Current Rating : 3AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

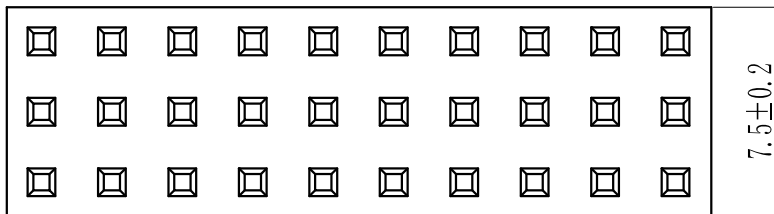

Pin数	尺寸A	尺寸B
3×2	2.54	5.58
3×3	5.08	8.12
3×4	7.62	10.66
3×5	10.16	13.20
3×6	12.70	15.74
3×7	15.24	18.28
3×8	17.78	20.82
3×9	20.32	23.36
3×10	22.86	25.90
3×11	25.40	28.44
3×12	27.94	30.98
3×13	30.48	33.52
3×14	33.02	36.06
3×15	35.56	38.60
3×16	38.10	41.14
3×17	40.64	43.68
3×18	43.18	46.22
3×19	45.72	48.76
3×20	48.26	51.30
3×21	50.80	53.84
3×22	53.34	56.38
3×23	55.88	58.92
3×24	58.42	61.46
3×25	60.96	64.00
3×26	63.50	66.54
3×27	66.04	69.08
3×28	68.58	71.62
3×29	71.12	74.16
3×30	73.66	76.70
3×31	76.20	79.24
3×32	78.74	81.78
3×33	81.28	84.32
3×34	83.82	86.86
3×35	86.36	89.40
3×36	88.90	91.94
3×37	91.44	94.48
3×38	93.98	97.02
3×39	96.52	99.56
3×40	99.06	102.10

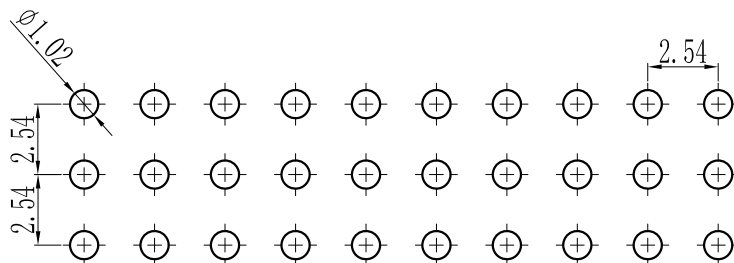

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINTOP ELECTRONICS CO.,LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-FH-254-0176
	LINEAR 0.0±0.30	ANGLES X° REF±6°	APPROVED				DWG. NO:
UNIT: MM	0.00±0.20	X° ±3°	DESIGNER			TITLE: Pitch2.54mm Female Header, Triple Row, Plastic Height 8.5mm, DIP(Y)	REV: A0 SHEET: 1/1
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16		