

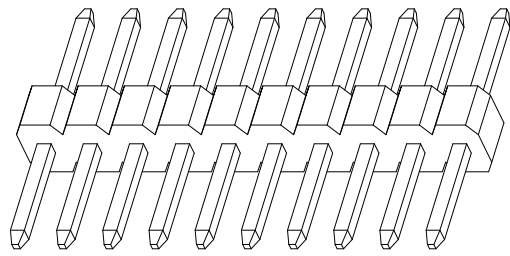


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

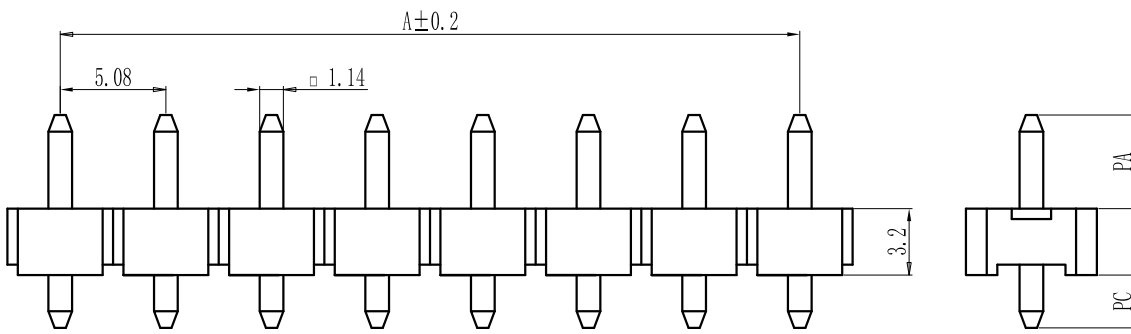


Specification:  
 Current Rating : 7AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

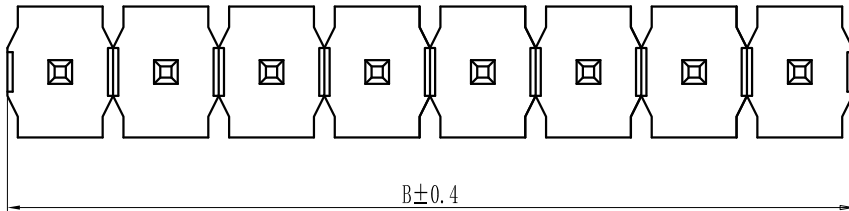

Pin数	尺寸A	尺寸B
1×1	-	5.08
1×2	5.08	10.16
1×3	10.16	15.24
1×4	15.24	20.32
1×5	20.32	25.40
1×6	25.40	30.48
1×7	30.48	35.56
1×8	35.56	40.64
1×9	40.64	45.72
1×10	45.72	50.80
1×11	50.80	55.88
1×12	55.88	60.96
1×13	60.96	66.04
1×14	66.04	71.12
1×15	71.12	76.20
1×16	76.20	81.28
1×17	81.28	86.36
1×18	86.36	91.44
1×19	91.44	96.52
1×20	96.52	101.6

PCB LAYOUT

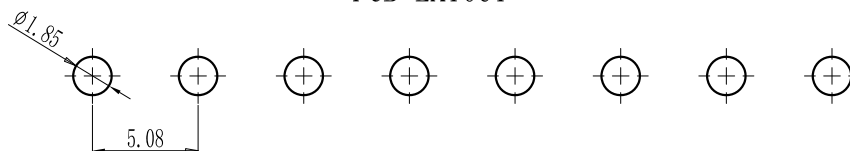

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINTOP ELECTRONICS CO.,LTD 公司地址: www.szsituo.cn      公司电话: 0755-23765350 邮 箱: 2850175982@qq.com      公司传真: 0755-23765341	PART. NO: ST-PH-508-0123	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
	0.0±0.30	X° REF±6°	DESIGNER				REV: A0	SHEET: 1/1
	UNIT: MM	0.00±0.20	X° ±3°	DRAWN	肖坤权		2017.06.16	
SIZE: A4	0.000±0.10	X° X'±2°				TITLE: Pitch5.08mm Pin Header, Single Plastic, Single Row, DIP		