

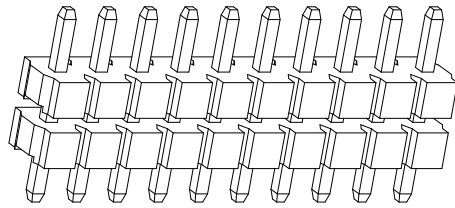


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

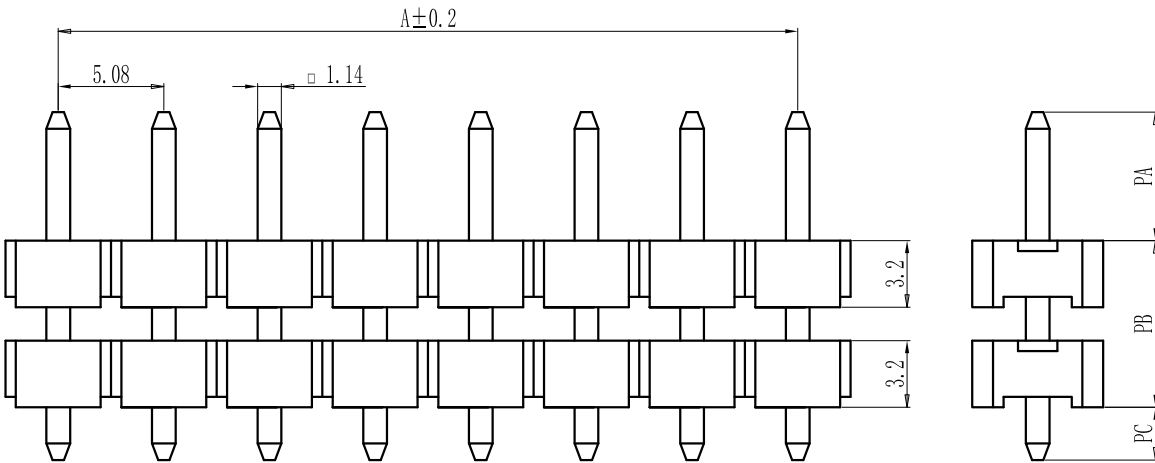


Specification:
 Current Rating : 7AMP
 Temperature Range : -40°C to +105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard: PA6T/LCP
 Contact: Brass
 Plating : Au or Sn Over 50u" Ni

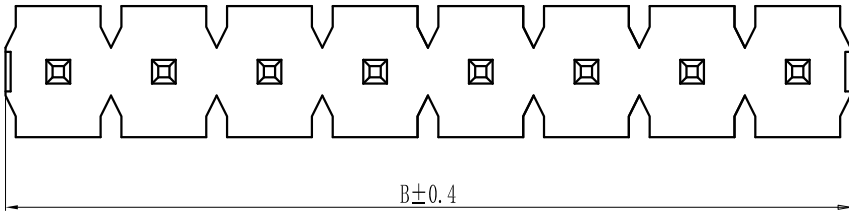

Pin数	尺寸A	尺寸B
1×1	-	5.08
1×2	5.08	10.16
1×3	10.16	15.24
1×4	15.24	20.32
1×5	20.32	25.40
1×6	25.40	30.48
1×7	30.48	35.56
1×8	35.56	40.64
1×9	40.64	45.72
1×10	45.72	50.80
1×11	50.80	55.88
1×12	55.88	60.96
1×13	60.96	66.04
1×14	66.04	71.12
1×15	71.12	76.20
1×16	76.20	81.28
1×17	81.28	86.36
1×18	86.36	91.44
1×19	91.44	96.52
1×20	96.52	101.6

PCB LAYOUT

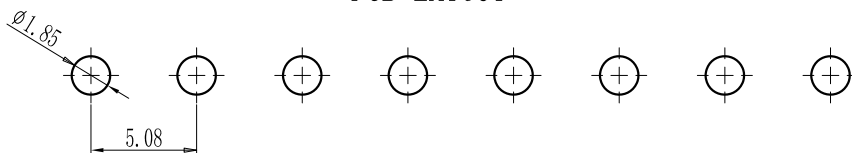

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-PH-508-0121	
	LINEAR	ANGLES					APPROVED	DWG. NO:
UNIT: MM	0.0 ± 0.30	X° REF ± 6°	DESIGNER	TITLE: Pitch 5.08mm Pin Header, Dual Plastic, Single Row, DIP	REV: A0	SHEET: 1/1		
SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN	肖坤权	2017. 06. 16			