


仅供参考




REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

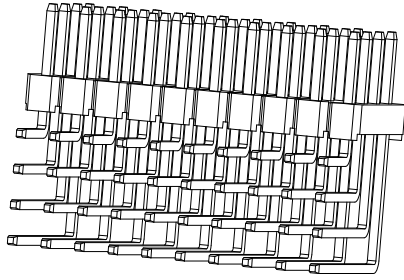


Specification:
 Current Rating : 3.0AMP
 Temperature Range : -40°C to +105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 1000V
 Material:

Insulator : Polyester (UL94V-0)
 Standard: PBT/PA6T/LCP

Contact: Brass
 Plating : Au or Sn Over 50u" Ni

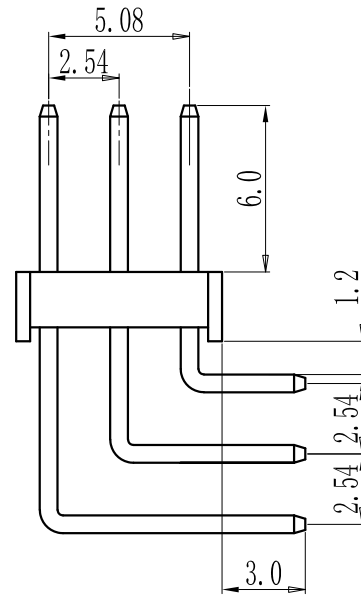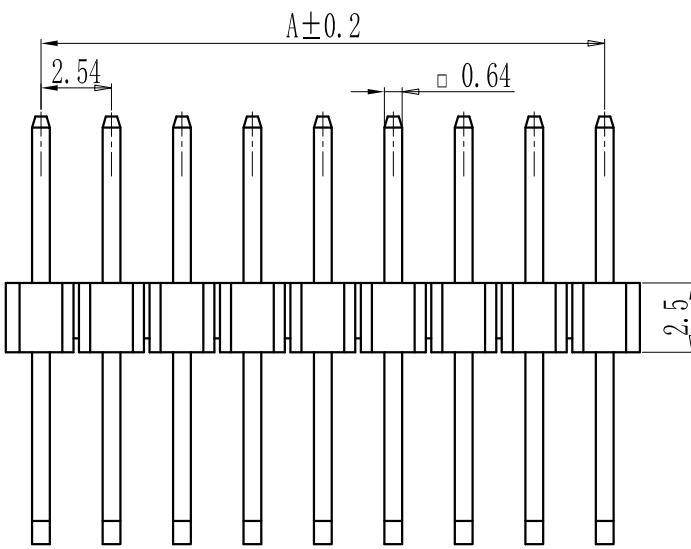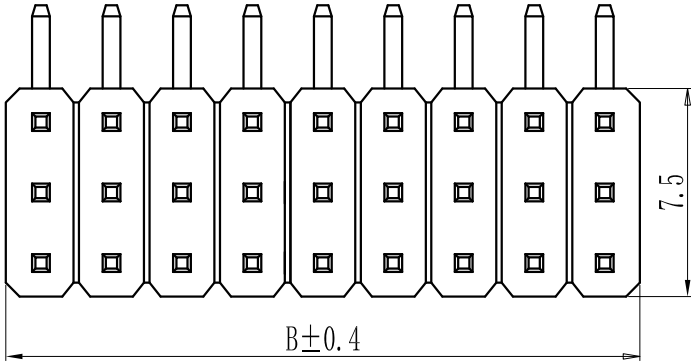

Pin数	尺寸A	尺寸B
3×1	-	2.54
3×2	2.54	5.08
3×3	5.08	7.62
3×4	7.62	10.16
3×5	10.16	12.70
3×6	12.70	15.24
3×7	15.24	17.78
3×8	17.78	20.32
3×9	20.32	22.86
3×10	22.86	25.40
3×11	25.40	27.94
3×12	27.94	30.48
3×13	30.48	33.02
3×14	33.02	35.56
3×15	35.56	38.10
3×16	38.10	40.64
3×17	40.64	43.18
3×18	43.18	45.72
3×19	45.72	48.26
3×20	48.26	50.80
3×21	50.80	53.34
3×22	53.34	55.88
3×23	55.88	58.42
3×24	58.42	60.96
3×25	60.96	63.50
3×26	63.50	66.04
3×27	66.04	68.58
3×28	68.58	71.12
3×29	71.12	73.66
3×30	73.66	76.20
3×31	76.20	78.74
3×32	78.74	81.28
3×33	81.28	83.82
3×34	83.82	86.36
3×35	86.36	88.90
3×36	88.90	91.44
3×37	91.44	93.98
3×38	93.98	96.52
3×39	96.52	99.06
3×40	99.06	101.60

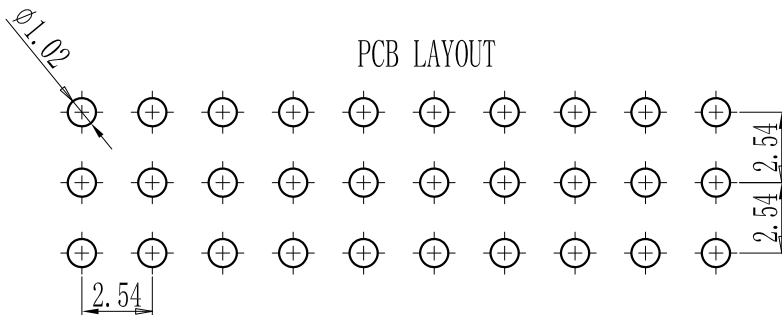

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:	
	LINEAR	ANGLES					APPROVED	ST-PH-254-0113
UNIT: MM	0.00±0.20	X° REF±6°	DESIGNER				DWG. NO:	
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	TITLE: Pitch2.54mm Pin Header, Single Plastic, Triple Row, Right Angle Type	REV: A0	SHEET: 1/1