

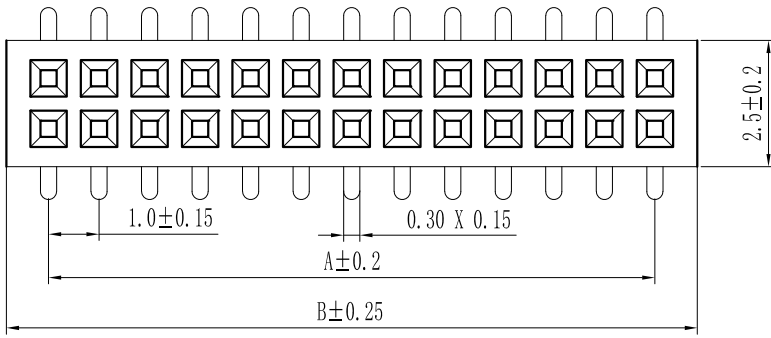





仅供参考

| | | |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE |
| A0 | 新图面发行 | 2017.06.16 |

Specification:
 Current Rating : 1AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:
 Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP
 Contact: Bronze
 Plating : Au or Sn Over 50u" Ni

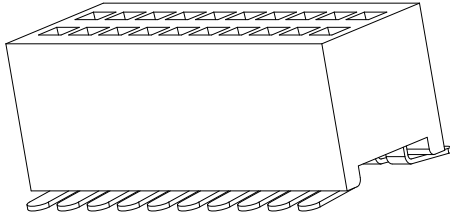

| Pin数 | 尺寸A | 尺寸B |
|------|-------|-------|
| 2x2 | 1.00 | 2.40 |
| 2x3 | 2.00 | 3.40 |
| 2x4 | 3.00 | 4.40 |
| 2x5 | 4.00 | 5.40 |
| 2x6 | 5.00 | 6.40 |
| 2x7 | 6.00 | 7.40 |
| 2x8 | 7.00 | 8.40 |
| 2x9 | 8.00 | 9.40 |
| 2x10 | 9.00 | 10.40 |
| 2x11 | 10.00 | 11.40 |
| 2x12 | 11.00 | 12.40 |
| 2x13 | 12.00 | 13.40 |
| 2x14 | 13.00 | 14.40 |
| 2x15 | 14.00 | 15.40 |
| 2x16 | 15.00 | 16.40 |
| 2x17 | 16.00 | 17.40 |
| 2x18 | 17.00 | 18.40 |
| 2x19 | 18.00 | 19.40 |
| 2x20 | 19.00 | 20.40 |
| 2x21 | 20.00 | 21.40 |
| 2x22 | 21.00 | 22.40 |
| 2x23 | 22.00 | 23.40 |
| 2x24 | 23.00 | 24.40 |
| 2x25 | 24.00 | 25.40 |
| 2x26 | 25.00 | 26.40 |
| 2x27 | 26.00 | 27.40 |
| 2x28 | 27.00 | 28.40 |
| 2x29 | 28.00 | 29.40 |
| 2x30 | 29.00 | 30.40 |
| 2x31 | 30.00 | 31.40 |
| 2x32 | 31.00 | 32.40 |
| 2x33 | 32.00 | 33.40 |
| 2x34 | 33.00 | 34.40 |
| 2x35 | 34.00 | 35.40 |
| 2x36 | 35.00 | 36.40 |
| 2x37 | 36.00 | 37.40 |
| 2x38 | 37.00 | 38.40 |
| 2x39 | 38.00 | 39.40 |
| 2x40 | 39.00 | 40.40 |
| 2x41 | 40.00 | 41.40 |
| 2x42 | 41.00 | 42.40 |
| 2x43 | 42.00 | 43.40 |
| 2x44 | 43.00 | 44.40 |
| 2x45 | 44.00 | 45.40 |
| 2x46 | 45.00 | 46.40 |
| 2x47 | 46.00 | 47.40 |
| 2x48 | 47.00 | 48.40 |
| 2x49 | 48.00 | 49.40 |
| 2x50 | 49.00 | 50.40 |

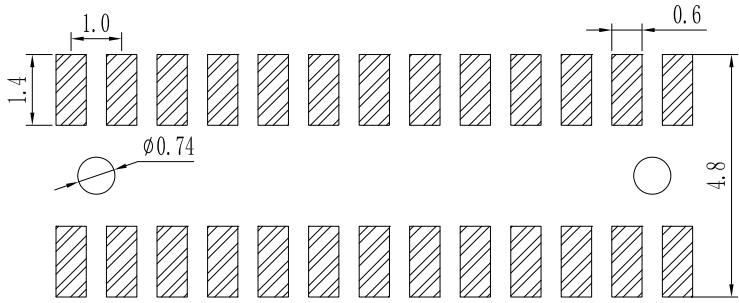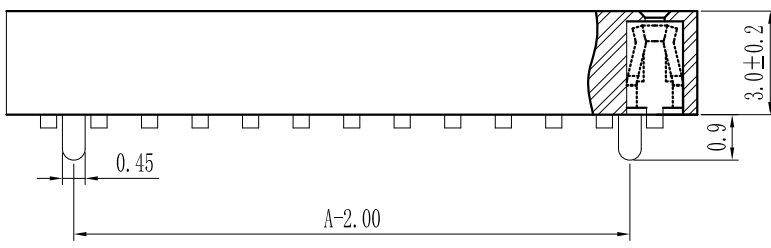

| |
|-----|
| PC |
| 3.2 |
| 3.8 |
| 4.1 |

PCB LAYOUT

| | | | | | | | | |
|----------|--------------------|-----------|---------------|------------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------|
| | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司地址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341 | PART. NO: ST-FH-100-0015 | |
| | LINEAR | ANGLES | | | | | APPROVED | DWG. NO: |
| UNIT: MM | 0.0±0.30 | X° REF±6° | DESIGNER | TITLE: Pitch1.00mm Female Header, Dual Row, Plastic Height 3.0mm, SMT (with Local Peg) Type(U) | | REV: A0 | SHEET: 1/1 | |
| SIZE: A4 | 0.000±0.10 | X° X'±2° | DRAWN | 肖坤权 | 2017.06.16 | | | |