



仅供参考


REV.	REVISION RECORD	DATE
AO	新图面发行	2017.06.16

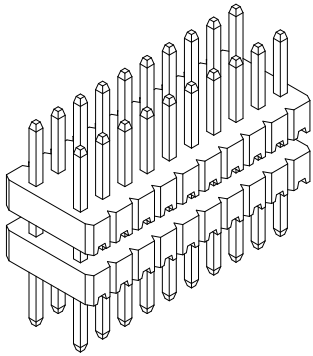


Specification:  
 Current Rating : 0.75AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 30mΩ Max  
 Insulation Resistance : 500MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

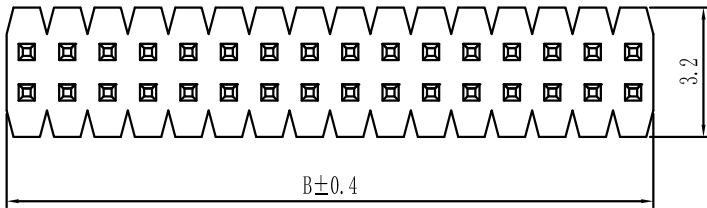

Height
H=1.0mm
H=1.5mm

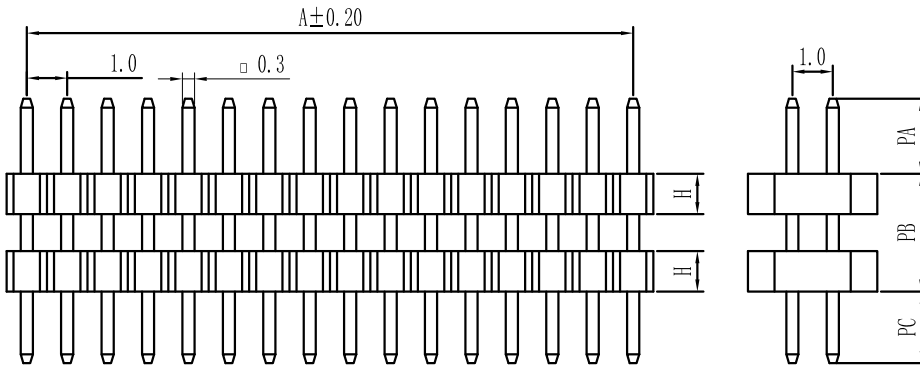

Pin数	尺寸A	尺寸B
2×2	1.0	2.0
2×3	2.0	3.0
2×4	3.0	4.0
2×5	4.0	5.0
2×6	5.0	6.0
2×7	6.0	7.0
2×8	7.0	8.0
2×9	8.0	9.0
2×10	9.0	10.0
2×11	10.0	11.0
2×12	11.0	12.0
2×13	12.0	13.0
2×14	13.0	14.0
2×15	14.0	15.0
2×16	15.0	16.0
2×17	16.0	17.0
2×18	17.0	18.0
2×19	18.0	19.0
2×20	19.0	20.0
2×21	20.0	21.0
2×22	21.0	22.0
2×23	22.0	23.0
2×24	23.0	24.0
2×25	24.0	25.0
2×26	25.0	26.0
2×27	26.0	27.0
2×28	27.0	28.0
2×29	28.0	29.0
2×30	29.0	30.0
2×31	30.0	31.0
2×32	31.0	32.0
2×33	32.0	33.0
2×34	33.0	34.0
2×35	34.0	35.0
2×36	35.0	36.0
2×37	36.0	37.0
2×38	37.0	38.0
2×39	38.0	39.0
2×40	39.0	40.0
2×41	40.0	41.0
2×42	41.0	42.0
2×43	42.0	43.0
2×44	43.0	44.0
2×45	44.0	45.0
2×46	45.0	46.0
2×47	46.0	47.0
2×48	47.0	48.0
2×49	48.0	49.0
2×50	49.0	50.0

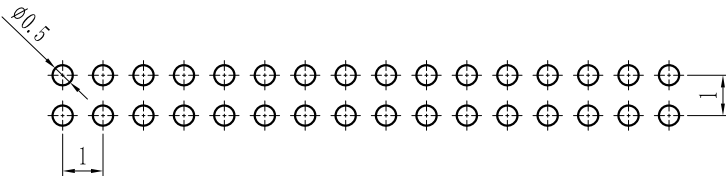

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szsituo.cn 2850175982@qq.com 公司电话: 0755-23765350 公司传真: 0755-23765341	PART. NO: ST-PH-100-0013	
	LINEAR	ANGLES					APPROVED	DWG. NO:
	0.0±0.30	X° REF±6°					DESIGNER	
	0.00±0.20	X° ±3°					DRAWN	
UNIT: MM	0.00±0.20	X° ±3°	TITLE: Pitch1.0mm Pin Header, Dual Plastic, Dual Row, DIP	REV: AO	SHEET: 1/1			