
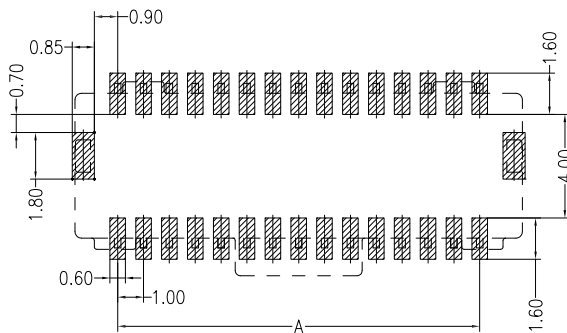
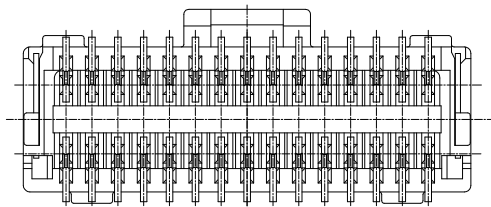
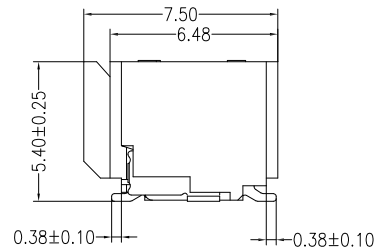
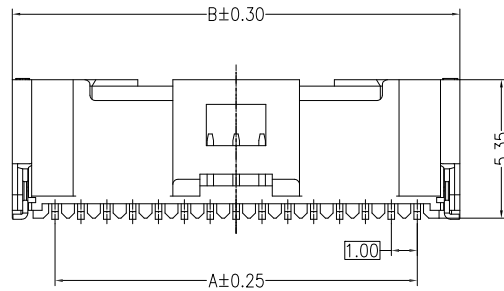
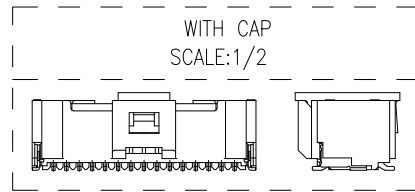
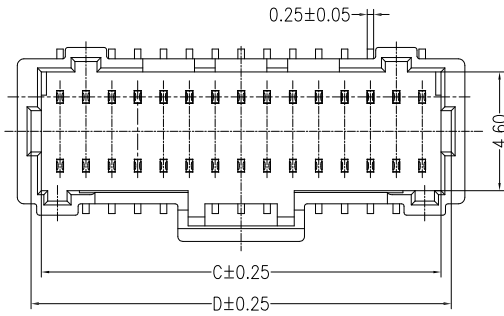


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:  
 Poles: 30 to 50  
 Contact resistance:  $\leq 20m\Omega$   
 Insulation resistance:  $\geq 100M\Omega$   
 Rated voltage: 50V AC DC  
 Rated current: 0.8A AC DC  
 Withstand Voltage: 250V AC/minute  
 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$   
 Housing: PA6T UL94V-0, Natural  
 Contacts: Phosphor Bronze/ Gold-plated  
 Solder tabs: Brass/MATTE Sn-plated  
 Cap: PA6T UL94V-0, Natural



PCB LAYOUT(Tolerance:  $\pm 0.05$ )

PIN.	DIM A	DIM B	DIM C	DIM D
2x10P	9.00	12.30	10.45	11.25
2x15P	14.00	17.30	15.45	16.25
2x20P	19.00	22.30	20.45	21.25
2x25P	24.00	27.30	25.45	26.25

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: www.szstuo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-WF-100-008AWV
	LINEAR	ANGLES					
UNIT: MM	0.00 $\pm$ 0.20	X° REF $\pm$ 6°	DESIGNER			TITLE:	DWG. NO:
SIZE: A4	0.000 $\pm$ 0.10	X° X' $\pm$ 2°	DRAWN	肖坤权	2017.06.16	1.0mm PITCH 180° WAFER SMT TYPE	REV: A0 SHEET: 1/1