
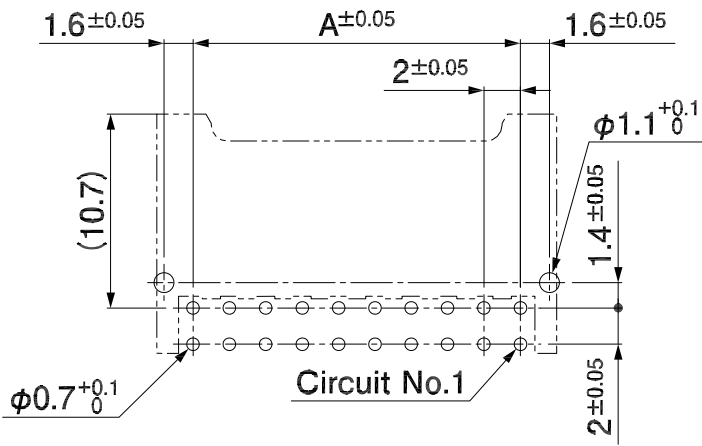
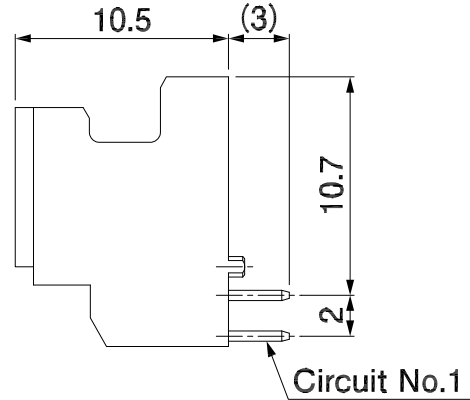


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

**主要技术参数 Main Specifications**

线数 (Poles): 10 to 40  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 125V AC DC  
 额定电流 (Rated current): 3.0A AC DC  
 耐电压 (Withstand Voltage): 500V AC/minute  
 温度范围 (Temperature Range):  $-40^{\circ}C \sim +105^{\circ}C$

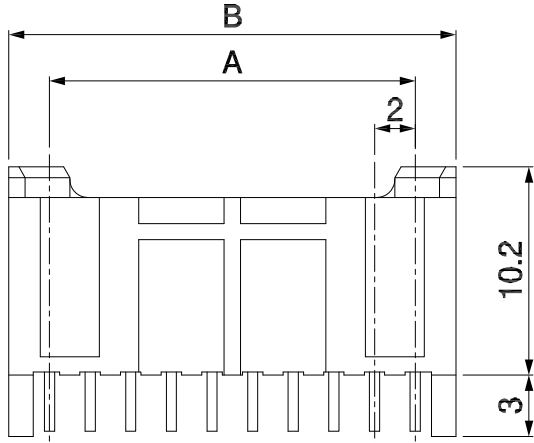

PCB LAYOUT

PIN	Dimensions	
	A	B
10P	8.00	12.00
12P	10.00	14.00
14P	12.00	16.00
16P	14.00	18.00
20P	18.00	22.00
22P	20.00	24.00
24P	22.00	26.00
40P	38.00	42.00

B	CONTACT	n PCS	Brass	Sn-plated
A	HOUSING	1 PCS	PA GLASS FILLED	UL 94V-0
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	<b>深圳市思拓展电子有限公司</b> SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:
	LINEAR	ANGLES	APPROVED				ST-WF-200-010AW
	0.0 ± 0.30	X° REF ± 6°	DESIGNER				DWG. NO:
	UNIT: MM	0.00 ± 0.20	X° ± 3°	DRAWN	肖坤权		2017.06.16
SIZE: A4	0.000 ± 0.10	X° X' ± 2°					REV: A0 SHEET: 1/1