




仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

技术说明:

Craft specifications

1. 材质 Material: PA66, UL94V-0.
2. 额定电流 Current rating: 1.0A AC, DC
3. 额定电压 Voltage rating: 50V AC, DC
4. 温度范围 Temperature range: -25°C to 85°C
5. 接触电阻 Contact resistance: $\leq 20 \text{ m}\Omega$
6. 绝缘电阻 Insulation resistance: $\geq 500 \text{ M}\Omega$

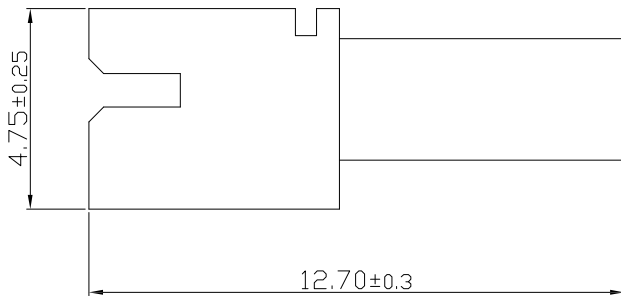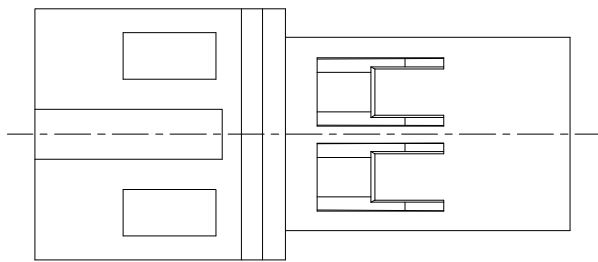





A	HOUSING	1 PCS	PA66	COLOR:WHITE			
ITFM	COMPONENT	Q'TY	MATERIAL	FINISH			
	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-WF-200-001R
	LINEAR	ANGLES	APPROVED				DWG. NO:
UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER			TITLE: 2.00mmPITCH HOUSING	REV: A0 SHEET: 1/1
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16		

仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

主要技术参数 Main Specifications

- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 150V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

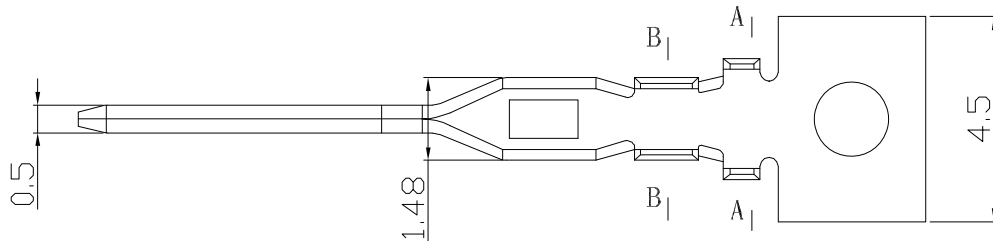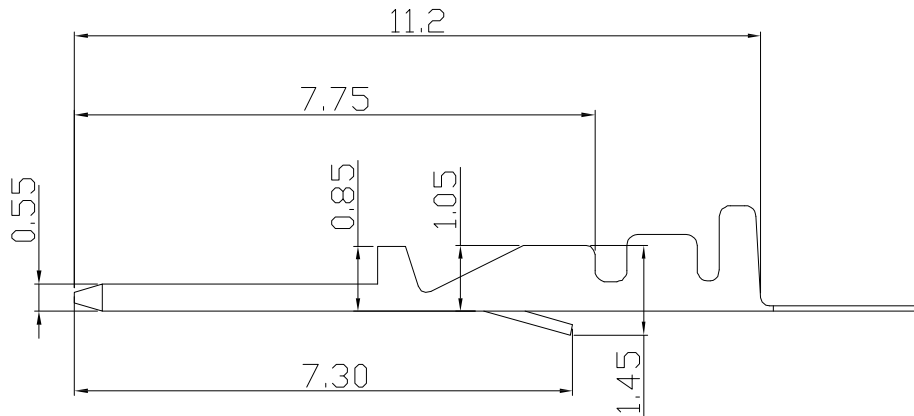

Wire Range	Insulation O. D.	Material	Finish	Qty/Reel
AWG #22~#28	1.0~1.50mm	Phosphor bronze	Tin-plated	10,000 pcs

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 电子邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-WF-200-001RT	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER			TITLE:	REV: A0 SHEET: 1/1	
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	2.00mm PITCH TERMINAL		